

# MODEL 631 - 632

## ENGINEERING DATA


### PUMP AND LINE BEARINGS

SECTION 630 PAGE 71  
DATED JANUARY 1982

BEARING TYPE	PUMP CONSTRUCTION	BEARING HOUSING MATERIAL	BUSHING MATERIAL		
			IRON	BRONZE	CUTLESS RUBBER
STANDARD BEARING FOR PIT DEPTHS UNDER 10'	BRONZE FITTED	BRONZE	NO	NO	REFER TO OPTIONAL BEARINGS
	ALL BRONZE	BRONZE	BUSHINGS REQUIRED	BUSHINGS REQUIRED	
	ALL IRON	IRON			
RELIEF BEARING STANDARD FOR PIT DEPTHS 10' AND DEEPER	BRONZE FITTED	STEEL		X	
	ALL BRONZE	BRONZE		X	
	ALL IRON	STEEL	X		
STANDARD LUBRICATION			GREASE		PUMPED LIQUID
OPTIONAL LUBRICATION			WATER FLUSH-OIL (1)		WATER - FLUSH (2)

(1) OIL - FOR LINESHAFT BEARINGS ONLY.  
(2) WATER FLUSH- RELIEF HOUSING ONLY.

#### STANDARD

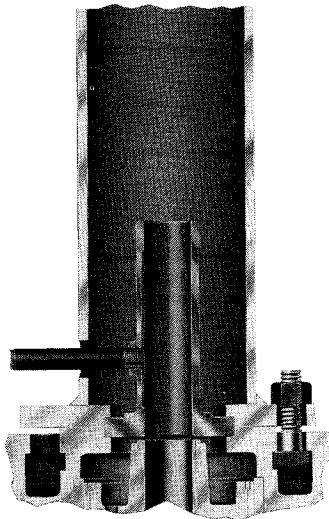

#### STANDARD

All 630 Series pumps (except for 10 foot and deeper settings at 1750 R.P.M.) are furnished with bronze sleeve type bearing unless an optional style is specified and is also the standard lineshaft bearing for all


settings. The bearing is mounted directly above the impeller and receives lubrication from individual external grease lines. This bearing is also available in cast iron or ni-resist material. The majority of all vertical wet pit pump applications can be handled by this standard bearing. However, when pumping conditions are severe, abrasives are present in the liquid or the liquid temperature exceeds 140°F., one of the following optional bearings should be selected.

#### RELIEF

A RELIEF-TYPE PUMP BEARING WILL BE SUPPLIED AS STANDARD FOR 10 FOOT AND DEEPER SETTINGS AT 1750 R.P.M., and is otherwise optionally available. The relief-type bearing housing has three metal bushings inserted into the housing. When in operation, the liquid being pumped goes through the lower portion of the bearing under pressure and is vented to the sump through the annular ring. This venting action permits only a small amount of liquid, with a fraction of the abrasive content, to enter into the top half of the bearing housing; as a result, the upper portion which is not subject to pumping pressure wears at a much slower rate. The life expectancy of this optional design will be two to four times longer than the standard bearing. Since this relief-type

Two important parts in any sump pump construction are the pump and line bearings as they are immersed in the liquid. The line bearings frequently run wet or dry depending on the varying liquid level in the sump. A complete line of bearings for all types of service conditions is available. Line bearings are provided as standard on 6'-2" pump settings and for each additional 5' setting thereafter.

#### RELIEF

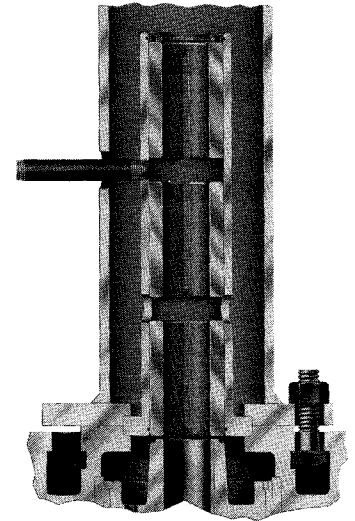

bearing housing is also used with the other bushing materials (Iron, Bronze, or Cutless Rubber) the same venting principle applies to these bushing materials. All three bushings can be constructed of different materials, therefore opening a wide range of applications. The STANDARD bearing is normally provided with this option on all lineshaft bearings; however, the IRON, BRONZE, or CUTLESS RUBBER options can also be provided for use as relief-type lineshaft bearings. The liquid being pumped provides the required lubrication for the lower bushing. An external grease line lubricates the upper bushings when bronze or iron bushings are provided. When other bushing materials are specified, they are water-flush lubricated from either the pump discharge pipe or a secondary city water supply, depending upon the application.

# MODEL 631 - 632


## ENGINEERING DATA

### PUMP AND LINE BEARINGS

BEARING TYPE	PUMP CONSTRUCTION	BEARING HOUSING MATERIAL	BUSHING MATERIAL		
			IRON	BRONZE	CUTLESS RUBBER
OPTIONAL RELIEF BEARING	BRONZE FITTED	STEEL		X	X
	ALL BRONZE	BRONZE		X	X
	ALL IRON	STEEL	X		X
OPTIONAL SPOOL BEARING	BRONZE FITTED	STEEL		X	X
	ALL IRON	STEEL	X		X
STANDARD LUBRICATION			GREASE		PUMPED LIQUID
OPTIONAL LUBRICATION			WATER FLUSH OIL (1)		WATER - FLUSH (2)

(1) OIL - FOR LINESHAFT BEARINGS ONLY.  
 (2) WATER FLUSH - RELIEF HOUSING ONLY.


#### CUTLESS RUBBER

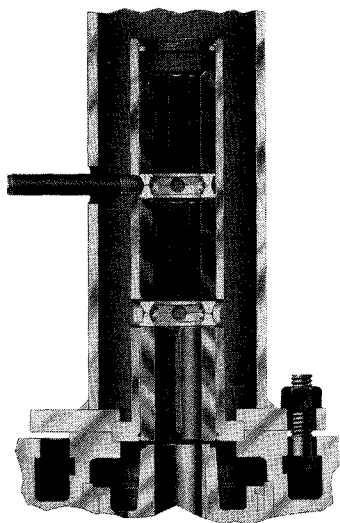

#### CUTLESS RUBBER (OPTIONAL BEARING)

This bearing consists of a carbon steel relief-type bearing housing and two cutless rubber bushings. A third bushing located at bottom of bearing housing is made of metal. This metal is bronze or iron, depending upon the pump construction material. This metal bushing carries most of the shaft bearing loads. As wear occurs, the bearing loads are gradually distributed among the remaining cutless rubber bushings, thus increasing total bearing life. Lubrication can be supplied by the liquid being pumped when used as a pump bearing. When used as an optional lineshaft bearing, water flush lubrication is provided. The water flush lines may be connected to the pump discharge pipe or a secondary city water supply, depending upon the application. Grease lubrication is not recommended. Cutless rubber bearings may be used in conjunction with STANDARD lineshaft bearings which are also capable of water flush lubrication. This option is recommended for applications where abrasives are held in suspension in the liquid pumped. The excellent abrasive-resistant characteristics of rubber give this bearing several times the wear life of a standard bearing. Stainless steel shafting is recommended. **DO NOT APPLY THIS OPTION WHEN THE LIQUID TEMPERATURE EXCEEDS 140°F.; IN SUCH CASES, SELECT ONE OF THE OTHER BEARING OPTIONS.**

#### SPOOL

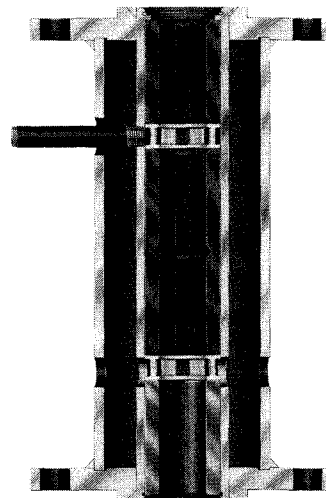

#### SPOOL (OPTIONAL BEARING)


This bearing can be supplied as an optional bearing for any pump setting. It is intended for use as a rigid pump bearing for unusually rugged pump applications. It retains the lubrication characteristics of the relief bearing previously discussed. The housing can be equipped with different bushing materials (Iron, Bronze, or Cutless Rubber) depending upon the application. The bearing housing is of rigid "double-wall" metal construction and is flanged at each end. The outer pipe acts as a rigid support while the inner pipe serves as a bushing carrier. This construction allows the bearing housing to be bolted to the support pipe at the upper flange and to the pump casing at the lower flange, thus making this housing a rigid and integral part of the pump support piping system. Undesirable bearing housing deflections under high shaft loads are eliminated by this rigid construction thus providing positive pump shaft guidance. The additional length of this bearing provides increased bearing area for rugged applications. A lubrication line attached to the bearing housing may be connected to the pump discharge pipe or a secondary city water supply, or grease lubricated, depending upon the application. This bearing may be used in conjunction with STANDARD lineshaft bearings which are also capable of water flush lubrication.

# AURORA MODEL 632 PUMP ON DUPLEX PLATE WITH TWO OVALS AND MANHOLE

SECTION 630 PAGE 255

DATED FEBRUARY 1991


SUPERSEDES PAGE 255  
DATED DECEMBER 1971

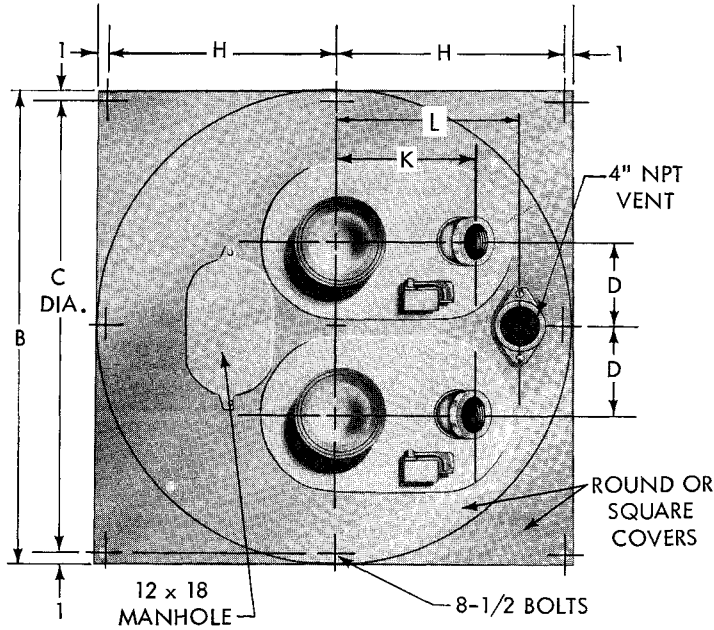

PUMP SIZE			E	F	K	
DISCH	SUCTION	CASE BORE			20 X 24 OVAL	22 X 28 OVAL
4	4	7	4-1/2	11-7/8	12-3/8	11-3/8
4	4	9	4-1/2	11-7/8	12-3/8	11-3/8
4	4	12	4-1/2	11-7/8		11-3/8
6	6	12	5-7/8†	13-7/16†		13

COVER SIZE B Rd. or sq.	C ROUND	H SQUARE	G	OVAL USED	D	L
			STL			
46**	44	22	1/2	20 x 24	10-1/2	17
53	51	25-1/2	5/8	22 x 28	11-1/2	19
60	58	29	5/8	22 x 28	11-1/2	19
66	64	32	3/4	22 x 28	11-1/2	19
78	76	38	3/4	22 x 28	11-1/2	19

FRAME	X	Y
143HP	13-7/8	11
145HP	13-7/8	12
182HP	13-7/8	13
184HP	13-7/8	14
213HP	13-7/8	16
215HP	13-7/8	17
254HP	13-7/8	19
256HP	13-7/8	21
284HPH	15-5/8	21
286HPH	15-5/8	23
324HP	15-5/8	24
326HP	15-5/8	25

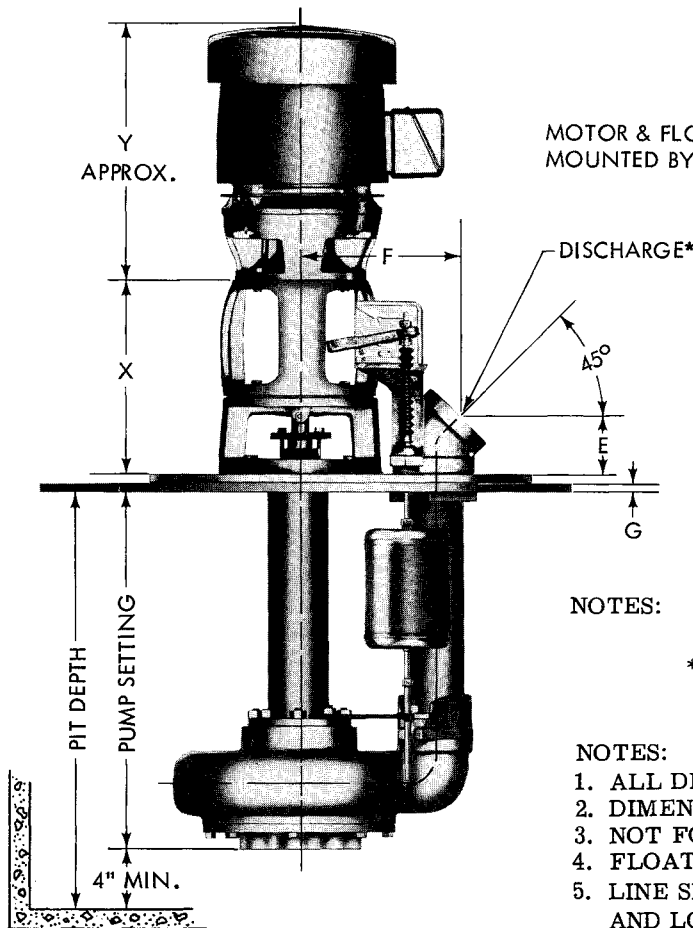

MOTOR & FLOAT SWITCH  
MOUNTED BY OTHERS

NOTES: \* STD DISCHARGE ELBOW IS THREADED (FLANGED ELBOW CONNECTIONS AVAILABLE).

\*\* 4 x 4 x 12 AND 6 x 6 x 12 PUMPS NOT AVAILABLE ON 46" BASIN COVERS.

† FLANGED ELBOW STANDARD

NOTES:

1. ALL DIMENSIONS IN INCHES.
2. DIMENSIONS MAY VARY ± 3/8.
3. NOT FOR CONSTRUCTION PURPOSES UNLESS CERTIFIED.
4. FLOAT SWITCH FURNISHED ONLY WHEN SPECIFIED.
5. LINE SHAFT BEARING FURNISHED ON 6' 2" PUMP SETTINGS AND LONGER.
6. SQUARE COVERS AVAILABLE ONLY IN STEEL.